


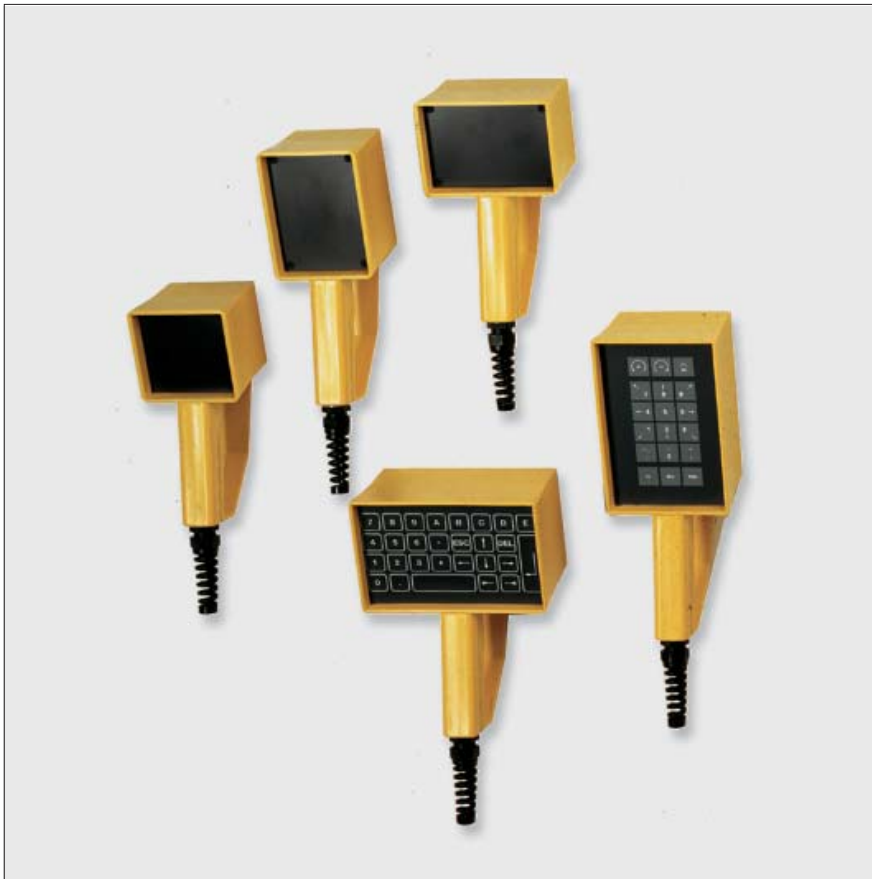

- Polyamide hand enclosure for automation and control technology
- Version with handle and integrated cable exit
- Large fitting space

Included in delivery

Enclosure with handle, including cable gland M 20 x 1.5, front panel, enclosure and front panel screws, and wall holder

Technical data

Material:

Polyamide

Ingress protection:

IP 65 to EN 60529

Impact resistance:

> 7 Joule to DIN 50014

Temperature range:

-40°C to +60°C

Colour:

yellow, similar to RAL 1021

Pilot 110 - 150

Programme range

Enclosure type	Order No.	Encl. dimensions incl. handle W x L x H (mm)	Front panel dimensions W x H (mm)	Mounting depth (mm)
Pilot 110	29.21 10 00	85 x 85 x 191	77 x 77	63.5
Pilot 120	29.21 20 00	115 x 85 x 191	107 x 77	63.5
Pilot 130	29.21 30 00	85 x 85 x 221	77 x 107	63.5
Pilot 140	29.21 40 00	160 x 85 x 211	152 x 97	63.5
Pilot 150	29.21 50 00	105 x 85 x 266	97 x 152	63.5

Accessories

Magnetic holder (for Pilot 120 - 150)	29.00 00 80
Push button and switches see page 55 -60	on request




Electromechanical components

On request, we can supply equipment fitted with electro-mechanical components such as emergency stop button, acknowledge keys, hand wheel, switches, display

Dimensions



Type	Order No.	Weight (kg)
Pilot 110	29.21 10 00	0,307

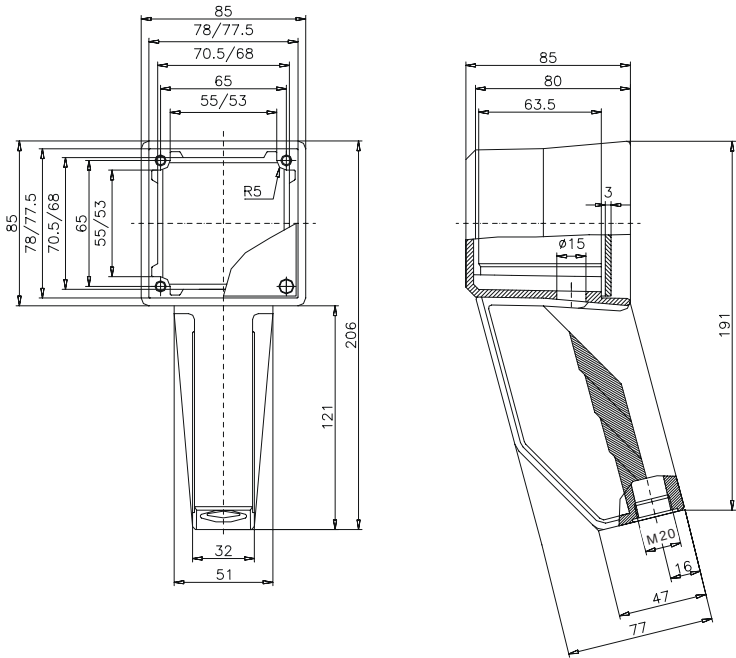


Free dimension tolerance to DIN 16901 - 140




Type	Order No.	Weight (kg)
Pilot 120	29.21 20 00	0,341
Pilot 130	29.21 30 00	0,341

Pilot 120

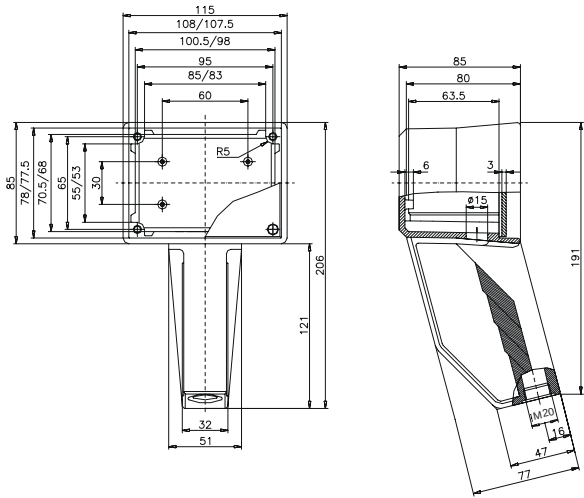

Pilot 130

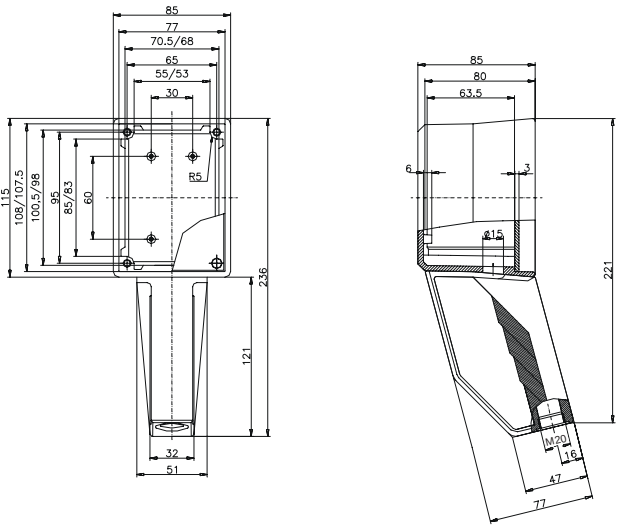

Free dimension tolerance to DIN 16901 - 140


Pilot 110 - 150

Dimensions




Type	Order No.	Weight (kg)
Pilot 140	29.21 40 00	0,434
Pilot 150	29.21 50 00	0,434

Pilot 140

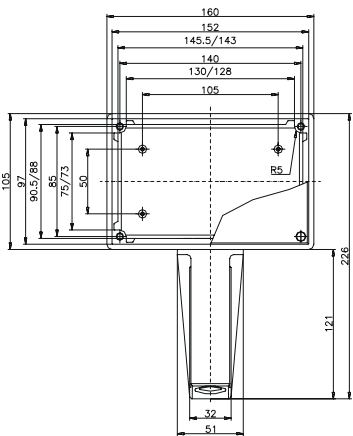

Pilot 150

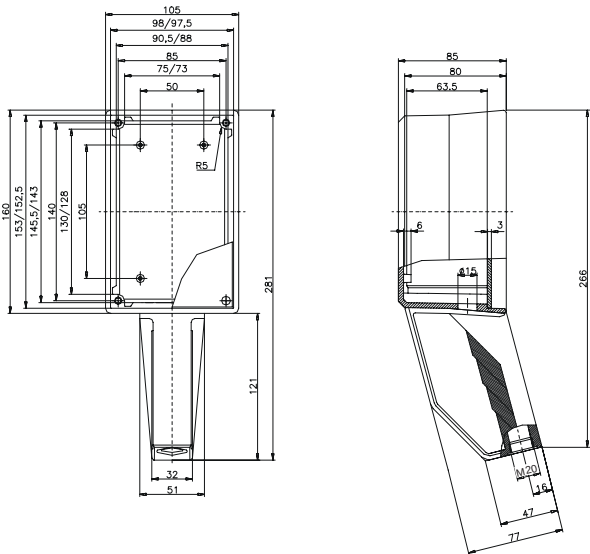

Free dimension tolerance to DIN 16901 - 140

Accessories



Magnetic holder
for Pilot 120 - 150, self-adhesive

Order No. **29. 00 00 80**